

## Vacuum/Pressure Sensors 0-5000PSI, 4-20mA



- Pressure ranges from 0-1bar, 0-10psi, 0-50psi, 0-100psi, 0-500psi, 0-1000psi, 0-5000psi
- Compact, rugged construction
- Output signals: 4-20mA
- Stainless steel
- Isolated construction, able to test various media
- Enhanced anti-interference and surge protection
- Vented gauge and absolute pressure
- Piezoresistive pressure sensor, silicone oil filled
- A wide range of pressure and electrical connections

The Oceanic Systems Pressure Sensor range can monitor a wide range of liquids or gas pressures in the marine environment.


The Pressure Sensors have high stability and feature enhanced anti-interference and surge protection.

The units use a high performance piezoresistive pressure transducer as the sensing part, and the inner structure is O-ring sealed. All the sensors have a -10 to 70°C wide temperature compensation.

# Pressure Sensors 0-5000psi 4-20mA

## Part No. 4620 - 4626

### Dimensions

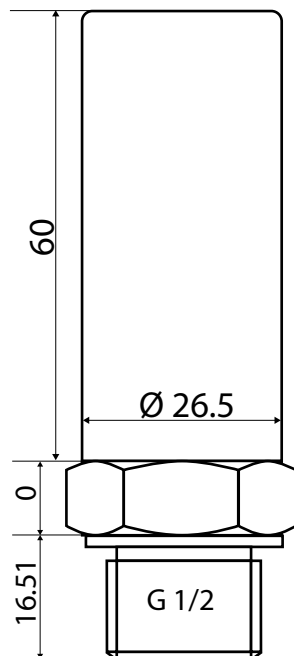

Technical data		
Accuracy @25°C (incl. non-linearity, hysteresis and repeatability)	±0.5% F.S.	
Non-linearity BFSL (conformity)	≤ ±0.3% F.S.	
Hysteresis and repeatability	≤ ±0.1% F.S.	
Response time	< 4 ms	
Pressure range	-1...0bar; 0...0.1bar to 1000bar nical	
Overload pressure	2.0 × F.S. (≤ 250 bar)	
	1.5× F.S. (> 250 bar)	
	1.2× F.S. (1000bar)	
Pressure type	vented gauge, absolute	
Long term stability	≤0.2%F.S./Year	
Temperature coefficient	±0.03%F.S./°C	
Electrical		
Medium temperature range	-20°C > +100°C	
Ambient temperature range (depending on electrical connection)	-20°C > +80°C	
Compensated temperature range	-10°C > +70°C	
EMC - Emission	EN 61000-6-3	
EMC - Immunity	EN 61000-6-1	
Insulation resistance	>100 MΩ at 250 V	
Environmental		
Materials	Diaphragm	Stainless steel 316L
	Enclosure	Stainless steel 304
	Electrical connections	PA66, stainless steel
	O-ring	Viton
Weight (depending on pressure connection and electrical connection)		0.15 - 0.3 kg
Pressure connection	G1/2" BSP	
Electrical connection	Direct cable	
Mechanical		
Medium temperature range	-20°C > +100°C	
Ambient temperature range (depending on electrical connection)	-20°C > +80°C	
Compensated temperature range	-10°C > +70°C	
EMC - Emission	EN 61000-6-3	
EMC - Immunity	EN 61000-6-1	
Insulation resistance	>100 MΩ at 250 V	
Part number	Pressure range	
4620	0-1 bar Vacuum	
4621	0-10psi	
4622	0-50psi	
4623	0-100psi	
4624	0-500psi	
4625	0-1000psi	
4626	0-5000psi	

Oceanic Systems (UK) Ltd  
 Unit 10-11 Milton Business Centre, Wick Drive,  
 New Milton, Hampshire, BH25 6RH, United Kingdom

Tel: +44(0)1425 610022 Fax: +44(0)1425 614794  
 Email: sales@osukl.com Web: www.osukl.com

Copyright © 2020 Oceanic Systems (UK) Ltd. All rights reserved. Our policy is one of continuous product improvement so product specifications are subject to change without notice. Oceanic Systems products are designed to be accurate and reliable. However, they should be used only as aids to vessel monitoring, and not as a replacement for traditional navigation and vessel monitoring techniques.

NMEA2000® is a registered trademark of the National Marine Electronics Association.